



MFG. BY LIANZA INDUSTRIES

📍 Sr/No.571/2, Plot No 1, Khokhra Industries, Bela-Morbi 363641 (INDIA)
☎ 1800 843 4511 📞 99135 77775 ✉ Export@lapifix.in 🌐 www.lapifix.in



How to use



UNBREAKABLE BOND
UNMATCHED DURABILITY



TILE ADHESIVE | EPOXY | GROUT | OTHER BUILDING MATERIALS



LA'PI FIX is your one stop solution for everything related to Construction Chemicals, Epoxy, Adhesives, Admixtures, Sealers and other various applications like grouting, fixing tiles, waterproofing. At LA'PI FIX, we have implemented world class practices that ensure our products lasts long. Bid good bye to all your worries with regards to building material. Say hello to a worry free future, say hello to LA'PI FIX




UNBREAKABLE BOND

UNMATCHED DURABILITY



LX - STANDARD HIGHLY-DURABLE TILES ADHESIVE

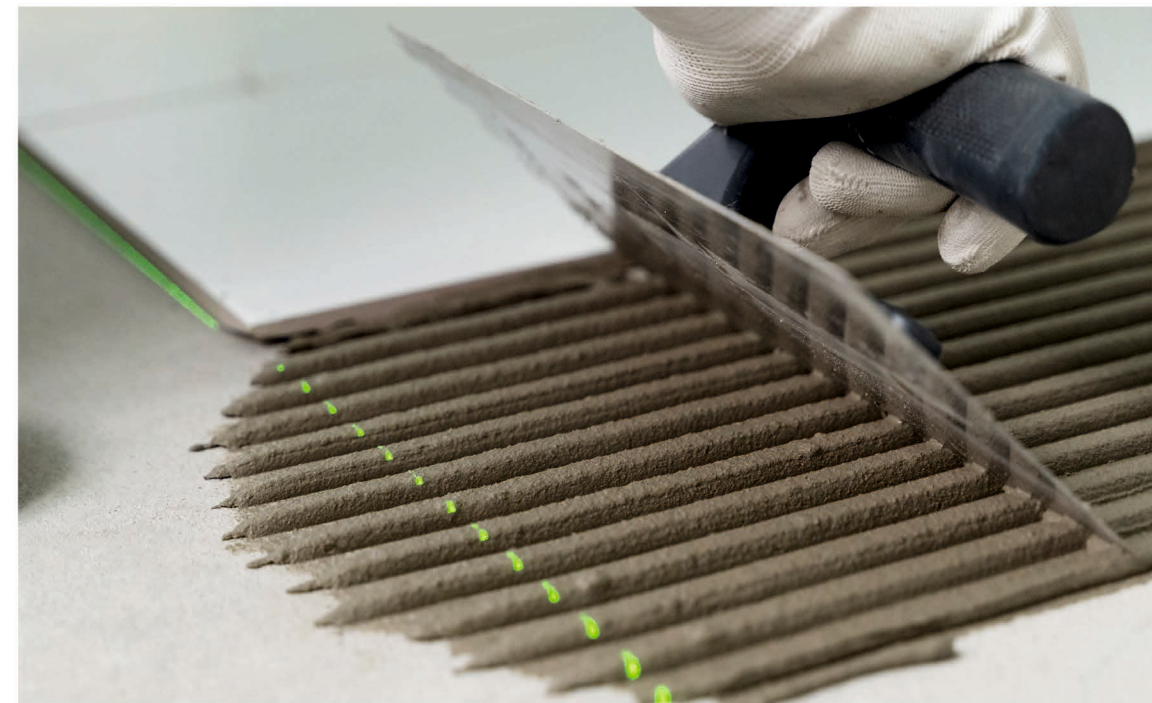

C1T - TYPE - 1 (GREY)

PRODUCT DETAILS:

LA'PI FIX STANDARD is a high polymer modified, cement based tile adhesive, which is suitable for fixing ceramic tiles and porcelain vitrified tiles for internal floor application. Consult LA'PI FIX regarding use of a higher performance adhesive for applications in difficult and demanding situations.

Shelf Life & Storage

Shelf life is 12 months from the date of manufacturing in unopened condition. Store in a cool & dry place.

COVERAGE

This will depend on the nature and lateness of surface and method of application, but at 3MM/4MM thickness approx 40 to 45 sq.ft per 20 kg bag when using a thin-bed trowel. For good coverage, it is important that all surface should be clean, smooth, plumb, level and free from defect & undulations.

TECHNICAL INFORMATION

PROPERTIES	RESULTS
Appearance	Free flowing powder
Colour	Grey
Pot life	2.30 Hours
Open time	40 Min.
Adjustability time	25 Min.
Trafficable time, Hrs	16 To 24
Shear adhesion, dry condition (as per annex B)	1.05 - 1.20
Tensile adhesion, dry condition (as per annex A)	0.6 - 0.7
EN 12004 Standards	C1T



LX - SUPER HIGHLY-DURABLE TILES ADHESIVE



C2TE - TYPE - 2 (GREY)

PRODUCT DETAILS:

LA'PI FIX SUPER is a high polymer modified, cement based tile adhesive, which is suitable for fixing ceramic tiles and porcelain vitrified tiles for internal floor & wall as well tile on tile applications. Consult LA'PI FIX regarding use of a higher performance adhesive for applications in difficult and demanding situations.

Shelf Life & Storage

Shelf life is 12 months from the date of manufacturing in unopened condition. Store in a cool & dry place.

COVERAGE

This will depend on the nature and lateness of surface and method of application, but at 3MM/4MM thickness approx 40 to 45 sq.ft per 20 kg bag when using a thin-bed trowel. For good coverage, it is important that all surface should be clean, smooth, plumb, level and free from defect & undulations.

Note

When Adhesive is used for vertical surface, make sure to use proper support during process.

www.lapifix.in 03..04

TECHNICAL INFORMATION

PROPERTIES	RESULTS
Appearance	Free flowing powder
Colour	Grey
Pot life	2.30 Hours
Open time	40 Min.
Adjustability time	25 Min.
Trafficable time, Hrs	16 - 24
Shear adhesion, dry condition (as per annex B)	1.25-1.40 N/MM2
Tensile adhesion, dry condition (as per annex A)	1.05 -1.20 N/MM2
EN 12004 Standards	C2TE



LX - PLATINUM

SEMI FLEXIBLE HIGH-PERFORMANCE TILE ADHESIVE



C2TE - TYPE - 3 (GREY & WHITE)

PRODUCT DETAILS:

LA'PI FIX PLATINUM ADHESIVE IS a semi flexible tile high-performance adhesive for external tiles and stones, swimming pool tile, tile on tile, wall cladding, vertical and horizontal surfaces. This is a highly polymer-modified adhesive with enhanced properties that make it suitable for use for large-format tiles, natural stones On floor as well wall. LA'PI FIX PLATINUM Adhesive Provides you highly Heat resistance while using on external wall.

Shelf Life & Storage

Shelf life is 12 months from the date of manufacturing in unopened condition. Store in a cool & dry place.

COVERAGE

This will depend on the nature and lateness of surface and method of application, but at 3MM/4MM thickness approx 40 to 45 sq.ft per 20 kg bag when using a thin-bed trowel. For good coverage, it is important that all surface should be clean, smooth, plumb, level and free from defect & undulations.

Note

When Adhesive is used for vertical Surface make sure to use proper Support during process.

www.lapifix.in 05..06

TECHNICAL INFORMATION

PROPERTIES	RESULTS
Appearance	Free flowing powder
Colour	Grey / White
Pot life	2.30 Hours
Open time	35 Min.
Adjustability time	20 Min.
Trafficable time, Hrs	16 - 24
Shear adhesion, dry condition (as per annex B)	1.60-1.70 N/MM2
Tensile adhesion, dry condition (as per annex A)	1.60 -1.65 N/MM2
EN 12004 Standards	C2TE



LX - PREMIUM

RUBBER MODIFIED SUPER FLEXIBLE TILE ADHESIVE



C2TE S1 - TYPE - 4 (GREY & WHITE)

RUBBER MODIFIED SUPER FLEXIBLE TILE ADHESIVE

PRODUCT DETAILS:

LA'PI FIX PREMIUM ADHESIVE is a rubber modified highly flexible high-performance adhesive for all types of external tiles and stones, vertical and horizontal surfaces. This is a highly rubber polymer-modified adhesive with enhanced properties that make it suitable for use for large-format vitrified tiles, natural stones, swimming pool, marble, and terrazzo On floor & wall as well heavy traffic area. LA'PI FIX PREMIUM Adhesive has phenomenal properties that allow it to withstand vibrations on the surface and high resistance to external conditions.

Shelf Life & Storage

Shelf life is 12 months from the date of manufacturing in unopened condition. Store in a cool & dry place.

COVERAGE

This will depend on the nature and lateness of surface and method of application, but at 3MM/4MM thickness approx 40 to 45 sq.ft per 20 kg bag when using a thin-bed trowel. for good coverage, it is important that all surface should be clean, smooth, plumb, level and free from defect & undulations.

Note

When Adhesive is used for vertical Surface make sure to use proper Support during process.


www.lapifix.in 07..08

TECHNICAL INFORMATION

PROPERTIES	RESULTS
Appearance	Free flowing powder
Colour	Grey / White
Pot life	2.30 Hours
Open time	35 Min.
Adjustability time	20 Min.
Trafficable time, Hrs	16 - 24
Shear adhesion, dry condition (as per annex B)	1.70-1.80 N/MM2
Tensile adhesion, dry condition (as per annex A)	1.80 -1.90 N/MM2
EN 12004 Standards	C2TE S1



LX - PU SUPERIOR MODIFIED MULTI SURFACE FLEXIBLE TILE & STONE ADHESIVE

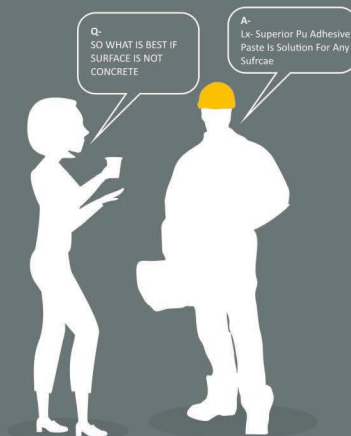

PRODUCT DETAILS:

LA'PI FIX LX-PU SUPERIOR is a high-strength polyurethane epoxy-based adhesive used to fix a wide range of materials such as metal, plywood, cement boards, and engineered stones. This adhesive is formulated for specialized application on a highly-flexible and diverse range of substrates for fixing tiles and stones. Its unique hybrid technology of PU-Epoxy makes it the best in class in the market. The ultimate adhesive to fix anything on anything.

Application Procedure

Mix base and hardener properly and then applied.

ADVANTAGES

- Suitable for fixing vitrified tile for Floor & Wall
- Two part Epoxy reactive adhesive
- Very good strength
- Used for spot bonding
- Excellent squeezability
- Fast cure

TECHNICAL INFORMATION

PROPERTIES	RESULTS
Appearance	Paste
Colour	White
Shear Strength	>3.4 N/mm2 @28 Days
Tensile Strength	>3 N/mm2 @28 Days



LX - EPOXY GROUT (1KG & 5KG)

SUITABLE FOR LARGE FLOOR AND INSTALLATIONS



PRODUCT DETAILS: (Premium/Sparkle)

LA'PI FIX EPOXY is a hygienic, hard-wearing, impervious, epoxide resin-based grout with a high degree of resistance to chemical attack, abrasion and impact. The cured grout does not transfer taints to foodstuffs and does not permit the entry of bacteria or dirt. It is easily maintained in a sterile condition

FEATURES

Stain free, color fast, Easy to install and clean, Water cleanable when fresh, Non-cracking or powdering, Anti-bacterial and Anti-fungal chemical & temperature resistance, Easy maintenance, Available in range, Hard & durable joint, High strength & versatile, Waterproof.

COVERAGE ESTIMATES

Consumption depends on Joint width, Size of tiles and good workmanship.

APPLICATION AREAS

Walls, Floors, interiors, Exterior, Dry & Wet areas, Work tops, Showers, Swimming Pools, Heavily trafficked floors, Hygienic sterile chemical resistance areas, hydrotherapy pools.



Bright White	Quarry Red	Silk	Almond	Antique White	Sauterne
Dusty Rose	Parchment	Buff	Mocha	Sandstone	Marble Beige
Midnight Black	Sky Blue	Alpine Blue	Burgundy	Silver Shadow	Slate Grey
Natural Grey	Sterling Silver	Platinum	Raven	Mushroom	Canyon Red
Mayan Red	Sable	Hemp	Ivy	Sierra Sunrise	Inca Gold
Sage	Saltillo	Aqua Blue	Sapphire	Smoke Grey	Cadmium Red



TILE GROUT (1 KG)

SUITABLE FOR LARGE FLOOR AND INSTALLATIONS



PRODUCT DETAILS:

LA'PIFIX Tile Grout is a high quality fine, polymer modified, water-resistant, cement - based powder grout designed for grouting glaze wall tiles, mosaics, vitrified & fully vitrified tiles, floor tiles, industrial floor tiles, etc. (Note: where chemical resistance is hygienic and sterile, it is important use Tile Grout)

SHELF LIFE & STORAGE

Shelf life is 24 months from the date of manufacturing in unopened condition. Store in a cool & dry place.





GROUT ADMIX (200 ML)
HIGH POLYMERIZED ADMIXTURE



SUPER
STRONG



PREMIUM
PRODUCT



DAMP
APPLICATION



HEAT
RESISTANT



LOW
CONSUMPTION



PRODUCT DETAILS:

LA'PIFIX Grout Admix is specially designed Latex Admix to be used with Sanded & Unsanded Grout.

APPLICATIONS


It improves the performance of Portland cement grouts for all type of ceramic tile, brick, marble, natural stone and agglomerate stone installations.

BENEFITS

- Colour-fastness
- Flexibility
- Compressive strength
- Shock and chemical resistant
- Reduces water absorption
- Easy to clean

COVERAGE

Varies as per application

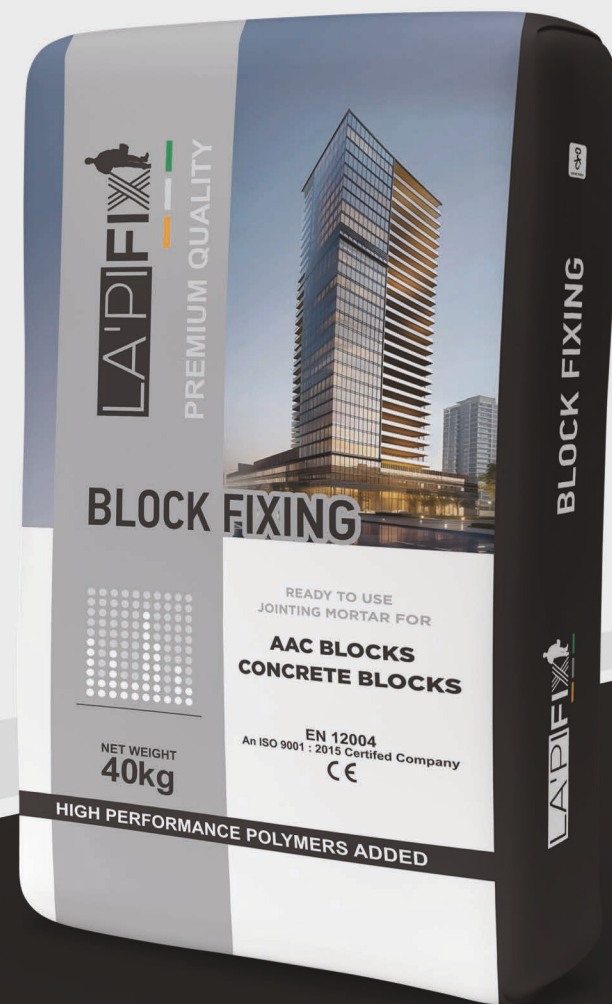

BLOCK FIXING AAC BLOCKS CONCRETE BLOCKS



SUPER
STRONG



PREMIUM
PRODUCT



DAMP
APPLICATION



HEAT
RESISTANT



LOW
CONSUMPTION



PRODUCT DETAILS:

LA'PI FIX Block Fixing is a factory prepared blend of carefully selected raw materials, Portland cement, graded aggregates and polymers. Designed for use with water to produce high strength thixotropic mortar ideal for laying aerated light weight concrete, fly ash bricks, cement hollow blocks, cellular concrete blocks or smoothing over the block work surface in layers of up to 12mm thickness that meet and exceed the requirements of National and International Standards.

ADVANTAGES

- Long working time
- No curing required after block work is done
- Improved adhesion between two blocks
- Fast & economical

COVERAGE

Approximately 100-130sq.ft. per 40kg bag. Coverage is based on smoothness and evenness of the substrate, size of blocks used and the thickness of mortar used. A general guideline for coverage of mortar is given when used with 25% water added to powder.

TECHNICAL INFORMATION

PROPERTIES	RESULTS
Appearance	Powder Grey
Water Demand	10 to 30%
Compressive Strength	>15 N/mm ² @28 Days
Tensile Strength	>0.8 N/mm ² @28 Days
Hard Dry	24 hour
Pot Life	Approx 2 hour



WALL PUTTY CEMENT-BASED PUTTY



PRODUCT DETAILS:

LA'PI FIX Wall putty is a cementitious substance that is designed and manufactured to even out surfaces to make them ready to be painted. This product is used for filling cracks and pores of different kinds. LA'PI FIX offers first-rate wall putty that helps you achieve a smooth and protective surface for painting surfaces. Secondly, due to its color and other properties, it makes it easy to apply all sorts of colors to the walls.

ADVANTAGES

- Easy to apply wall
- White smooth & finish putty
- Does not allow paint to flake
- Protects paint from moisture
- Curing is not required
- Ideal for interior & exterior walls

SUITABLE SURFACE

- Highly water
- Resistant
- Excellent
- Workability UV
- Resistance
- Strong bonding
- Economical & easy to use

MIXING RATIO

Add 200 ml to 300 ml of water for 1 kg.

COVERAGE

20 to 25 sq. ft. per 1 kg for coats, maintaining a maximum thickness of 0.75 mm to 1.5 mm on smooth plaster surface



LX - SBR (100 ML & 1 LTR)
FOR WATERPROOFING & REPAIRS



SUPER
STRONG



PREMIUM
PRODUCT



DAMP
APPLICATION



HEAT
RESISTANT



LOW
CONSUMPTION



PRODUCT DETAILS:

LA'PIFIX LX - SBR is a highly potent and versatile SBR based liquid for high performance applications in waterproofing and repairs.

TECHNICAL INFORMATION

- Type - Styrene Butadiene Polymer Liquid
- Color - White
- Specific Gravity - 1.02 + 0.02
- Storage Condition - Free from frost
- Solid Content - 44 + 1 %
- For best result - Use before 1 year if unopened Consumption - 1kg of LX SBR will cover 70 - 80 sq. ft. area in 2 coats for a proportion mix 1:4:7 (LX SBR : Water : Cement)



2K PROTECT (WATER PROOFING SYSTEM) (3 KG & 15 KG)
ACRYLIC CEMENTITIOUS WATERPROOFING COATING



PRODUCT DETAILS:

LA'PI FIX Two component polymer modified flexible and elastic cementitious waterproof cum anti-carbonation coating to be applied on sound substrates for extremely tough & durable waterproof render.

**Best suited For all structures
to be waterproofed & protected against ingress of moisture like :**

- Basement
- Water Tanks
- Swimming Pools
- Retaining Walls
- Bridge Walls
- Tunnels
- Lift Shafts
- Sewage Tanks
- Reservoirs
- Dams
- Dock Gates



**WATER
PROOFING**



ECO FRIENDLY



**PREMIUM
PRODUCT**



**LOW
CONSUMPTION**



CRACK FILLER (1 KG) FOR WALL CRACK FILLER



PRODUCT DETAILS:

LA'PI FIX Crack Filler ready-to-use fiber based compound with Crack Filler ability for both interior and exterior surfaces. Crack Filler ensures uncomparable crack bridging ability for plaster cracks of up to 3 mm

What it is:

Crack Filler is the process of filling cracks in pavement or walls with a material like rubberized asphalt or sand slurry.

When to use it:

Crack Filler is most effective when applied to early-stage cracks in pavement, such as longitudinal, transverse, reflection, or block cracks. Fatigue cracks are usually too large to fill with Crack Filler and may require a patch or reconstruction.

Benefits:


Crack Filler can extend the life of pavement by two to five years, depending on the pavement's condition, climate, and traffic. It can also protect the pavement from moisture damage and reduce further crack deterioration.



CRACK FILING
Strong filling capacity
for cracks of up to 3mm width.



WATERPROOFING
Water resistant film
stops water ingress through cracks.



MECHANICAL STRENGTH
Superior mechanical
strength due to reinforced glass fibres.



HIGH FLEXIBILITY
High elongation film
that accommodates movement.



LX - TAPO CLEANER (250ml) FOR TAP CLEANING



PRODUCT DETAILS:

LX - TAPO CLEANER is a powerful and gentle tap cleaner designed to remove lime scale, mineral deposits, and water spots from taps, faucets, and showerheads.

What it is:

LX - TAPO CLEANER also known as a Faucet Cleaner or Tap Shine, is a specialized cleaning product designed to clean and maintain taps, faucets, and showerheads

When to use it:

Home care, hospital's, hotels & restaurants, resorts, corporate offices, shopping malls, machineries & industries.

Benefits:

- Tapo Cleaner is liquid cleaning solution.
- Removes water scale from C P Bath Fittings.
- Removes Rust from stainless steel sink.
- Removes rust, stains, oily & sticky substances" from all the surfaces of stainless steel, ceramic & sanitary wares.



GERM FREE



ECO FRIENDLY



EASY TO CLEAN



**HIGH GLOSS
FINISH**



TILE CLEANER (500 ML & 1 LTR) HEAVY DUTY TILE CLEANER



PRODUCT DETAILS:

LA'PI FIX Tile Cleaner is a powerful, heavy duty, acid-based cleaner for ceramic & vitrified tile - wall & floor. The cleaner can be used as general purpose cleaner on other acid resistant surface.

AREAS OF APPLICATIONS

- Interior & Exterior
- Wall & Floor

BENEFITS

- Powerful formula
- Fast acting
- Easy to apply
- Removes cement film
- Remove efflorescence and most oxide stains.

NOTE

Do not use on surface that are not resistant to acid such as Natural stones, Terrazzo and CP Fittings.

TILES FIXING TOOLS



TILE SPACER

Use To Fix Tiles With Proper Space
Size : 2mm, 3mm, 4mm, 5mm, 6mm, 8mm, 10mm
Color : White, Yellow
Packing : 100pcs



TILE LEVELING KIT

Use To
Fix Tiles With Proper Level



CLIP

Size : 1mm, 1.5mm, 2mm,
2.5mm, 3mm, 4mm
Color : White | Packing : 50pcs



WEDGES

Color : Blue, Yellow, Red
Packing : 50pcs



TILE JACK

Use To Fix Tiles Height & Level
Color : Blue, Yellow, Red
Packing : 50pcs



TILE SPINNER LEVELING KIT

Use To Fix Tiles With Proper Level




CLIP

Size : 1mm, 1.5mm, 2mm,
2.5mm, 3mm, 4mm
Color : White | Packing : 50pcs



SPINNER

Color : Blue, Yellow, Red
Packing : 50pcs



METAL TROWEL

To Ensure an Even Layer of Adhesive



PLASTIC TROWEL

To Ensure an Even Layer of Adhesive